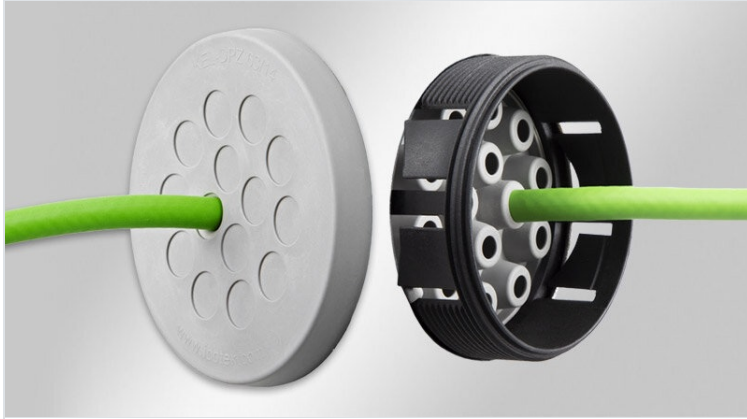


KEL-DPZ-CLICK multi-membrane cable entry plates

for snap-in mounting, M25 - M63 / IP65 / IP66 / IP68



IP54

IP55

IP64

IP65

IP66

IP67

IP68



KEL-DPZ-CLICK cable entry plates are designed to route and seal cables without connectors or fibre optics (from 1.5 mm to 22 mm in diameter) in limited space.

The new variant of the proven cable entry plate KEL-DPZ is snapped into the cut-out directly from the front. This significantly reduces the assembly time.

Alternatively, the new variant can be fastened with a locknut. The KEL-DPZ-CLICK series have a thread to fit in metric cut-outs from M25 to M63. Thus cut-outs for metric cable glands can be used.

Snapped into the cut-out:

For wall thickness 1 – 2.5 mm
Protection IP65

Fixed with a locknut:

For max. wall thickness 11 mm
Protection IP66 / IP68

The assembly of the KEL-DPZ-CLICK with unterminated cables or pneumatic hoses can be done quick and easy. Simply make a small hole in the thin membrane, push the cables through. The KEL-DPZ-CLICK provides strain relief and protection IP65 / IP66 / IP68 (certified acc. to EN 60529).

ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

Locknuts are **NOT** included in the shipment.

Specifications


IP rating (EN 60529)	IP54, IP55, IP64, IP65, IP66, IP67, IP68
Material	Elastomer Base frame: Polyamide
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	silicone free, halogen free
Mounting options	Fasten with locknut, Snap-in

Advantages & benefits

- Fast mounting
- Offers two mounting types: Snap-in and locknut fixation
- High cable density
- Certified protection classes IP65/IP66/IP68 (acc. to EN 60529)
- Automatic sealing and strain relief for the cable
- Suitable for metric cut-outs
- Hygienic design - free of dirt-collecting recesses


Product types & sizes

KEL-DPZ-CLICK 25|3
9y




Part No.	44050
EAN	4251269323065
Package quantity	10
For max. no. of cables	3
Max. cable diameter	6,5 mm
Colour	grey (similar RAL 7035)
Height	28 mm


Mounting height	8 mm
External diameter	39 mm
Cut-out size, round	25,3 mm
Cut-out size, metric	M25
Thread	M25 x 1,5
Thread length	20 mm
Suitable locknut	52284
Clamping range	2 x 3.2 - 5.2 mm 1 x 3.2 - 6.5 mm

**KEL-DPZ-CLICK 25|4
gy**


Part No.	44051	Mounting height	8 mm
EAN	4251269323072	External diameter	39 mm
Package quantity	10	Cut-out size, round	25,3 mm
For max. no. of cables	4	Cut-out size, metric	M25
Max. cable diameter	5,2 mm	Thread	M25 × 1,5
Colour	grey (similar RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52284
		Clamping range	4 x 3.2 - 5.2 mm

**KEL-DPZ-CLICK 32|4
gy**


Part No.	44052	Mounting height	8 mm
EAN	4251269323089	External diameter	44 mm
Package quantity	10	Cut-out size, round	32,3 mm
For max. no. of cables	4	Cut-out size, metric	M32
Max. cable diameter	12,5 mm	Thread	M32 × 1,5
Colour	grey (similar RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52285
		Clamping range	3 x 3.2 - 6.5 mm 1 x 7.2 - 12.5 mm

**KEL-DPZ-CLICK 32|4-2
gy**


Part No.	44053	Mounting height	8 mm
EAN	4251269323096	External diameter	44 mm
Package quantity	10	Cut-out size, round	32,3 mm
For max. no. of cables	4	Cut-out size, metric	M32
Max. cable diameter	9,5 mm	Thread	M32 × 1,5
Colour	grey (similar RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52285
		Clamping range	4 x 5 - 9.5 mm

**KEL-DPZ-CLICK 32|7
gy**

Part No.	44054	Mounting height	8 mm
EAN	4251269323102	External diameter	44 mm
Package quantity	10	Cut-out size, round	32,3 mm
For max. no. of cables	7	Cut-out size, metric	M32
Max. cable diameter	6,5 mm	Thread	M32 × 1,5
Colour	grey (similar RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52285
		Clamping range	7 x 3.2 - 6.5 mm


**KEL-DPZ-CLICK 40|8
gy**

Part No.	44055	Mounting height	8 mm
EAN	4251269323119	External diameter	52 mm
Package quantity	10	Cut-out size, round	40,4 mm
For max. no. of cables	8	Cut-out size, metric	M40
Max. cable diameter	10,2 mm	Thread	M40 × 1,5
Colour	grey (similar RAL 7035)	Thread length	20 mm
Height	28 mm	Suitable locknut	52286
		Clamping range	4 x 3.2 - 6.5 mm 4 x 5 - 10.2 mm

**KEL-DPZ-CLICK 50|8
gy**


Part No. **44056**
 EAN **4251269323126**
 Package quantity **10**
 For max. no. of cables **8**
 Max. cable diameter **12,5 mm**
 Colour **grey (similar RAL 7035)**
 Height **28 mm**

Mounting height **8 mm**
 External diameter **62 mm**
 Cut-out size, round **50,4 mm**
 Cut-out size, metric **M50**
 Thread **M50 x 1,5**
 Thread length **20 mm**
 Suitable locknut **52287**
 Clamping range **5 x 5 - 10.2 mm**
3 x 7.2 - 12.5 mm

**KEL-DPZ-CLICK 50|10
gy**


Part No. **44057**
 EAN **4251269323133**
 Package quantity **10**
 For max. no. of cables **10**
 Max. cable diameter **22,2 mm**
 Colour **grey (similar RAL 7035)**
 Height **28 mm**

Mounting height **8 mm**
 External diameter **62 mm**
 Cut-out size, round **50,4 mm**
 Cut-out size, metric **M50**
 Thread **M50 x 1,5**
 Thread length **20 mm**
 Suitable locknut **52287**
 Clamping range **7 x 3.2 - 6.5 mm**
2 x 5 - 10.2 mm
1 x 16 - 22.2 mm

**KEL-DPZ-CLICK 50|12
gy**


Part No. **44058**
 EAN **4251269323140**
 Package quantity **10**
 For max. no. of cables **12**
 Max. cable diameter **10,2 mm**
 Colour **grey (similar RAL 7035)**
 Height **28 mm**

Mounting height **8 mm**
 External diameter **62 mm**
 Cut-out size, round **50,4 mm**
 Cut-out size, metric **M50**
 Thread **M50 x 1,5**
 Thread length **20 mm**
 Suitable locknut **52287**
 Clamping range **4 x 3.2 - 6.5 mm**
8 x 5 - 10.2 mm

**KEL-DPZ-CLICK 50|19
gy**

Part No. **44059**
 EAN **4251269323157**
 Package quantity **10**
 For max. no. of cables **19**
 Max. cable diameter **6,5 mm**
 Colour **grey (similar RAL 7035)**
 Height **28 mm**


Mounting height **8 mm**
 External diameter **62 mm**
 Cut-out size, round **50,4 mm**
 Cut-out size, metric **M50**
 Thread **M50 x 1,5**
 Thread length **20 mm**
 Suitable locknut **52287**
 Clamping range **19 x 3.2 - 6.5 mm**

**KEL-DPZ-CLICK 50|78
gy**

Part No. **44060**
 EAN **4251269323164**
 Package quantity **10**
 For max. no. of cables **78**
 Max. cable diameter **5 mm**
 Colour **grey (similar RAL 7035)**
 Height **28 mm**

Mounting height **8 mm**
 External diameter **62 mm**
 Cut-out size, round **50,4 mm**
 Cut-out size, metric **M50**
 Thread **M50 x 1,5**
 Thread length **20 mm**
 Suitable locknut **52287**
 Clamping range **76 x 1.5 - 2.6 mm**
2 x 2.5 - 5 mm


**KEL-DPZ-CLICK 63|9
gy**



Part No. **44061**
EAN **4251269323171**
Package quantity **10**
For max. no. of cables **9**
Max. cable diameter **22,2 mm**
Colour **grey (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **75 mm**
Cut-out size, round **63,4 mm**
Cut-out size, metric **M63**
Thread **M63 × 1,5**
Thread length **20 mm**
Suitable locknut **52288**
Clamping range **1 x 3.2 - 6.5 mm**
3 x 5 - 10.2 mm
4 x 9 - 16.2 mm
1 x 16 - 22.2 mm


**KEL-DPZ-CLICK 63|13
gy**



Part No. **44062**
EAN **4251269323188**
Package quantity **10**
For max. no. of cables **13**
Max. cable diameter **16,2 mm**
Colour **grey (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **75 mm**
Cut-out size, round **63,4 mm**
Cut-out size, metric **M63**
Thread **M63 × 1,5**
Thread length **20 mm**
Suitable locknut **52288**
Clamping range **4 x 3.2 - 6.5 mm**
4 x 5 - 10.2 mm
5 x 9 - 16.2 mm


**KEL-DPZ-CLICK 63|14
gy**



Part No. **44063**
EAN **4251269323195**
Package quantity **10**
For max. no. of cables **14**
Max. cable diameter **10,2 mm**
Colour **grey (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **75 mm**
Cut-out size, round **63,4 mm**
Cut-out size, metric **M63**
Thread **M63 × 1,5**
Thread length **20 mm**
Suitable locknut **52288**
Clamping range **14 x 5 - 10.2 mm**

**KEL-DPZ-CLICK 63|35
gy**



Part No. **44064**
EAN **4251269323201**
Package quantity **10**
For max. no. of cables **35**
Max. cable diameter **6,5 mm**
Colour **grey (similar RAL 7035)**
Height **28 mm**

Mounting height **8 mm**
External diameter **75 mm**
Cut-out size, round **63,4 mm**
Cut-out size, metric **M63**
Thread **M63 × 1,5**
Thread length **20 mm**
Suitable locknut **52288**
Clamping range **35 x 3.2 - 6.5 mm**