

UT | Split U-shaped cable grommet

for cables with connectors, tool-free assembly / up to IP54



The UT cable grommet is an U-shaped cable bushing and makes it possible to route single pre-connectorised cables as well as standard cables with a diameter range of 4 to 11 mm into enclosures.

The wall thickness of the enclosure can be from 1 to 4 mm.

The UT is a split grommet that can be mounted around the cable. The UT grommet is ideal for installation on the lower part of the enclosure.

After fitting the grommet with the cable, it is inserted into the recommended cut-out. The enclosure cover is then placed on the lower part.

By screwing the cover tightly on the enclosure, pressure acts on the cable grommet and, depending on the properties of the enclosure, enables a sealing rate of up to IP54.

IP54

HL3
EN 45545-2

ECOLAB
certified

UV
ISO 4892-2A

RoHS
compliant

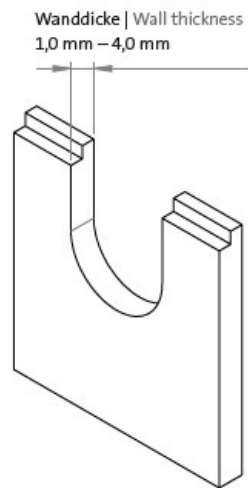
REACH
COMPLIANCE

Made in
Germany

Ausbruch | Cut-out

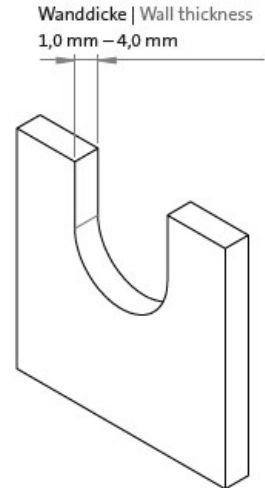
Gehäuse mit Nut – Federsystem

Housing with tongue and groove system



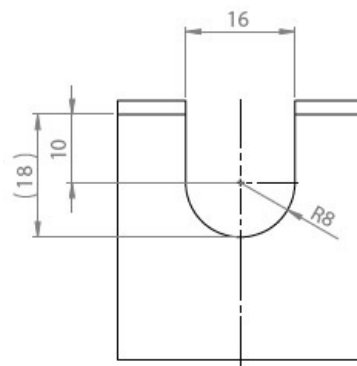
Gehäuse ohne Nut - Federsystem

Housing without tongue and groove system



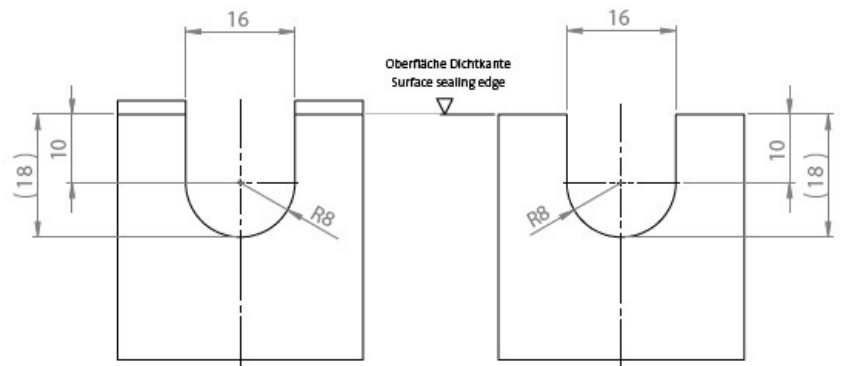
Ausbruch mit Nut

Cut-out with groove



Ausbruch ohne Nut

Cut-out without groove



Specifications


IP rating (EN 60529)	IP54
Material	Elastomer
Flame class	UL94-V0, self-extinguishing
Operating temperature	-40 C° to 100 C°
Properties	UV-resistant, silicone free, halogen free
Mounting options	Snap-in
Mounting height	5 mm

Advantages & benefits

- Allows the routing and sealing of cables that can vary in diameter up to 2 mm
- Simple, tool-free assembly
- Can be used for cable diameters from 4 to 11mm
- Protection class up to IP54 (if the grommet is selected correctly and depending on the enclosure properties)
- Cost-effective solution

Product types & sizes


UTB bk



Part No.	56100
EAN	4251269335464
Package quantity	10
Length	23,5 mm
Width	23 mm
Height	11 mm

Mounting height	5 mm
For min. wall thickness	1 mm
For max. wall thickness	4 mm
Colour	black


UTB gy



Part No.	56000
EAN	4251269335396
Package quantity	10
Length	23,5 mm
Width	23 mm
Height	11 mm

Mounting height	5 mm
For min. wall thickness	1 mm
For max. wall thickness	4 mm
Colour	grey (similar RAL 7035)


UT 4-6 bk



Part No.	56101
EAN	4251269335471
Package quantity	10
For max. no. of cables	1
Length	23,5 mm
Width	23 mm
Height	11 mm


Mounting height	5 mm
For min. wall thickness	1 mm
For max. wall thickness	4 mm
Colour	black
Clamping range	1 x 4 - 6 mm

UT 4-6 gy




Part No.	56001
EAN	4251269335402
Package quantity	10
For max. no. of cables	1
Length	23,5 mm
Width	23 mm
Height	11 mm

Mounting height	5 mm
For min. wall thickness	1 mm
For max. wall thickness	4 mm
Colour	grey (similar RAL 7035)
Clamping range	1 x 4 - 6 mm

UT 5-7 bk


Part No. **56102**
 EAN **4251269335488**
 Package quantity **10**
 For max. no. of cables **1**
 Length **23,5 mm**
 Width **23 mm**
 Height **11 mm**

Mounting height **5 mm**
 For min. wall thickness **1 mm**
 For max. wall thickness **4 mm**
 Colour **black**
 Clamping range **1 x 5 - 7 mm**

UT 5-7 gy


Part No. **56002**
 EAN **4251269335419**
 Package quantity **10**
 For max. no. of cables **1**
 Length **23,5 mm**
 Width **23 mm**
 Height **11 mm**

Mounting height **5 mm**
 For min. wall thickness **1 mm**
 For max. wall thickness **4 mm**
 Colour **grey (similar RAL 7035)**
 Clamping range **1 x 5 - 7 mm**

UT 6-8 bk


Part No. **56103**
 EAN **4251269335495**
 Package quantity **10**
 For max. no. of cables **1**
 Length **23,5 mm**
 Width **23 mm**
 Height **11 mm**

Mounting height **5 mm**
 For min. wall thickness **1 mm**
 For max. wall thickness **4 mm**
 Colour **black**
 Clamping range **1 x 6 - 8 mm**

UT 6-8 gy


Part No. **56003**
 EAN **4251269335426**
 Package quantity **10**
 For max. no. of cables **1**
 Length **23,5 mm**
 Width **23 mm**
 Height **11 mm**

Mounting height **5 mm**
 For min. wall thickness **1 mm**
 For max. wall thickness **4 mm**
 Colour **grey (similar RAL 7035)**
 Clamping range **1 x 6 - 8 mm**

UT 7-9 bk


Part No. **56104**
 EAN **4251269335501**
 Package quantity **10**
 For max. no. of cables **1**
 Length **23,5 mm**
 Width **23 mm**
 Height **11 mm**

Mounting height **5 mm**
 For min. wall thickness **1 mm**
 For max. wall thickness **4 mm**
 Colour **black**
 Clamping range **1 x 7 - 9 mm**

UT 7-9 gy


Part No. **56004**
 EAN **4251269335433**
 Package quantity **10**
 For max. no. of cables **1**
 Length **23,5 mm**
 Width **23 mm**
 Height **11 mm**

Mounting height **5 mm**
 For min. wall thickness **1 mm**
 For max. wall thickness **4 mm**
 Colour **grey (similar RAL 7035)**
 Clamping range **1 x 7 - 9 mm**

UT 8-10 bk


Part No. **56105**
 EAN **4251269335518**
 Package quantity **10**
 For max. no. of cables **1**
 Length **23,5 mm**
 Width **23 mm**
 Height **11 mm**

Mounting height **5 mm**
 For min. wall thickness **1 mm**
 For max. wall thickness **4 mm**
 Colour **black**
 Clamping range **1 x 8 - 10 mm**

UT 8-10 gy


Part No. **56005**
 EAN **4251269335440**
 Package quantity **10**
 For max. no. of cables **1**
 Length **23,5 mm**
 Width **23 mm**
 Height **11 mm**

Mounting height **5 mm**
 For min. wall thickness **1 mm**
 For max. wall thickness **4 mm**
 Colour **grey (similar RAL 7035)**
 Clamping range **1 x 8 - 10 mm**

UT 9-11 bk

Part No. **56106**
 EAN **4251269335525**
 Package quantity **10**
 For max. no. of cables **1**
 Length **23,5 mm**
 Width **23 mm**
 Height **11 mm**

Mounting height **5 mm**
 For min. wall thickness **1 mm**
 For max. wall thickness **4 mm**
 Colour **black**
 Clamping range **1 x 9 - 11 mm**

UT 9-11 gy

Part No. **56006**
 EAN **4251269335457**
 Package quantity **10**
 For max. no. of cables **1**
 Length **23,5 mm**
 Width **23 mm**
 Height **11 mm**

Mounting height **5 mm**
 For min. wall thickness **1 mm**
 For max. wall thickness **4 mm**
 Colour **grey (similar RAL 7035)**
 Clamping range **1 x 9 - 11 mm**